


## 5 Output, 3-24 VDC Interval Timer with Weekly Clock

### DESCRIPTION

Model 9262 is a 3-24 VDC interval timer. The 5 solid-state NPN outputs can each switch a DC load up to 5A. The minimum interval time is 100 ms. Interval sequences can be started on power up, from one of the four wired inputs, or from a weekly clock event, such as Monday at 8:00 am. Phenix interval timers are programmed using PC software, available online for free. The intervals and settings are then transferred into the timer through an infrared programmer, providing complete isolation from switching current.

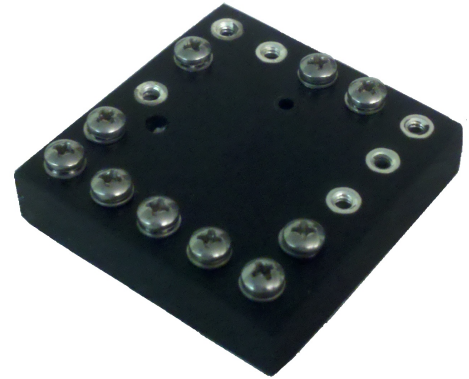

### SPECIFICATIONS

Power Switching Capability	5A
Output Count	5
Output Type	Solid-state NPN
Inputs	4
Memory Capacity	30 Intervals
Time Base	100 ms
Operating Temperatures	-20°C to 85°C
Operating Voltage	3-24 VDC
Dimensions ( L x W x H )	2.25 x 2.25 x 0.5
Clock Source	Crystal

### FEATURES

- Industrial Design
- 5A current per output
- Programmable
- Stores up to 30 intervals
- Automatically repeats
- Solid-state switches
- 4 input terminals
- Weekly clock

### APPLICATIONS

- Spa control
- Lighting timer
- Motor control
- Conveyor timing
- Pump control
- HVAC control
- Irrigation timer
- Process control
- Manufacturing timer
- Factory control


### ORDERING

Series	Operating Voltage	
--------	-------------------	--


9262 A → 3-12 VDC

B → 12-24 VDC

### 9262 Dimensions

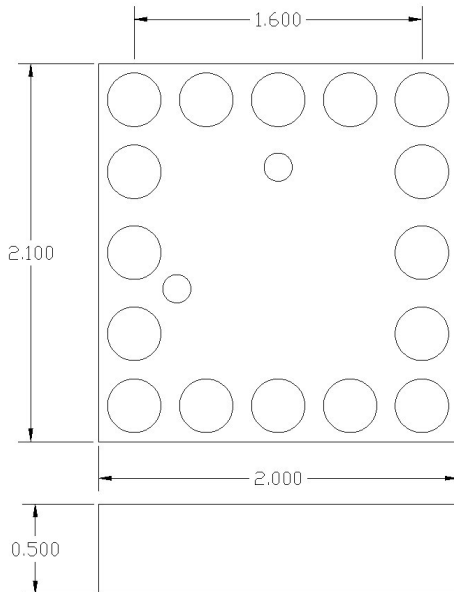

### 9262 Layout

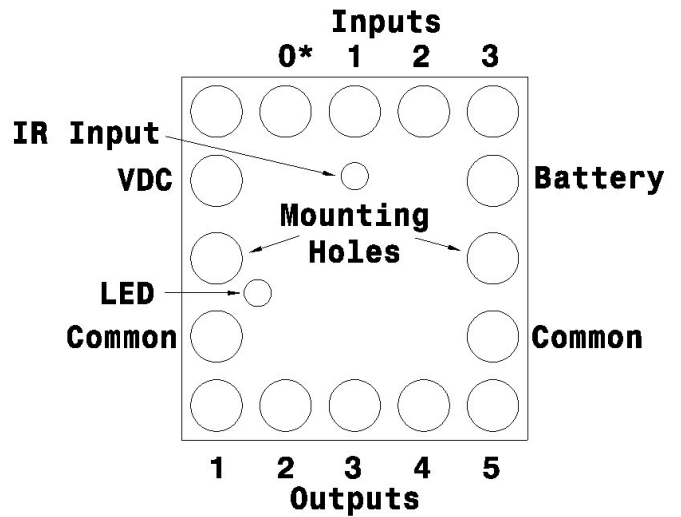

\*Input 0 is multi purpose and can be used for wired programming or Input pulse event

### 9262 Connection Diagram

